


Before updating the program, ensure that the computer and device are on the same LAN.

Step1: Find the intranet settings-intranet update software version

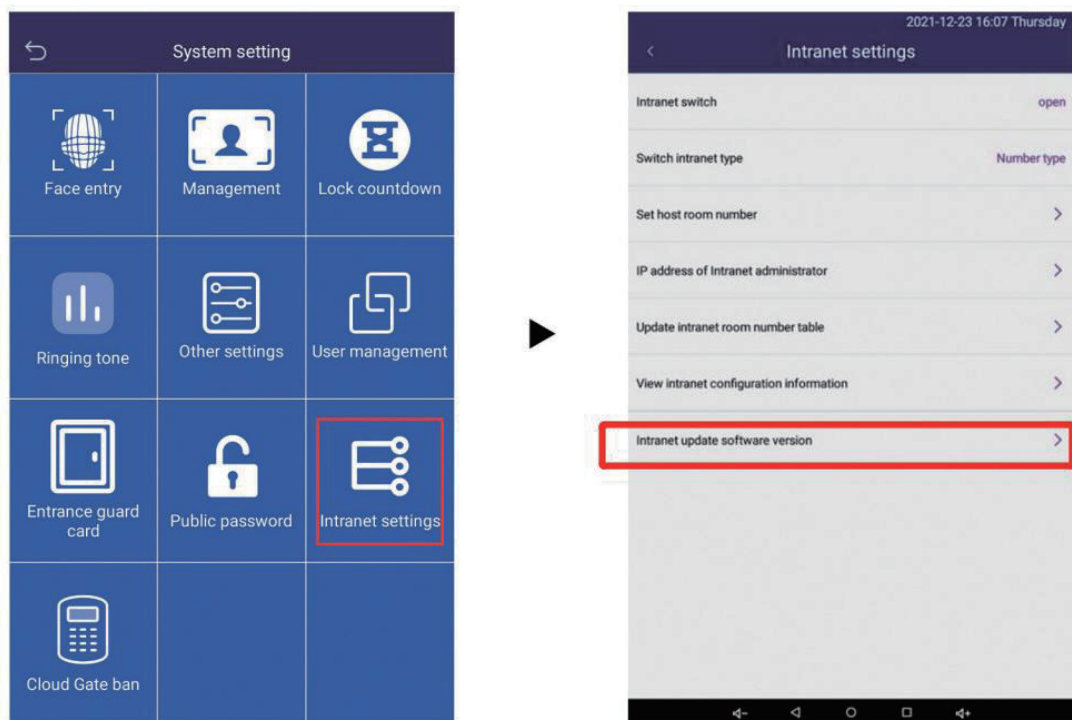

Step 2: You will find the NO.9: the intranet software version is updated. And click it, you will see the internet address .(for example 192.168.2.195:8082)

Step 3: Turn on your computer, Enter the address
(192.168.2.195:8082)

The above interface on the device cannot be closed.



Step 4: Click "select file" to select the home AD image (ad_1.png) and the graffiti ID file to be updated (please first extract the graffiti ID file in the email and save it in the computer), and then upload.



Step 5: Click Import and wait for the upgrade to complete.



Step 6: Restart the device